


PREMIUM QUALITY

Design Tiles





110-3




214



984A



8001-1



CL1016



2401


Subfloor Warning



Uneven Floor



Uneven Floor



Even Floor

Do not install over cracked, rough or uneven floors.

Repair and level before installation. The finished subfloor must be smooth, level and dry and free of dust, oil, old polish and wax.



SUPER STRONG
PVC FLOORING VINYL

Construction
PVC Flooring

Location Grade
Indoor, Residential

Surface Finish
Matt

Thickness
0.60mm

Available in:
1.83 x 5.00m

LOOSE LAY ONLY

NO ADHESIVE


H035-2


R001-2


R001-3


R001-11



MULTI-VINYL
PVC FLOORING VINYL

Construction
PVC Flooring

Location Grade
Indoor, Residential

Surface Finish
High Gloss

Thickness
0.35mm

Available in:
1.83 x 5.00m

LOOSE LAY ONLY

NO ADHESIVE


2304


9603


0302


8101

ECO-GREEN
ARTIFICIAL TURF

UV
COLOURFAST
6 YEARS







Size


1.50m x 2.00m Roompack

Location & Application

Location Grade: Indoor, Outdoor, Residential

Application: Balconies, Play Rooms, Landscaping, Pool and Recreational Areas

MULTI-LOCK INTERLOCKING TILES

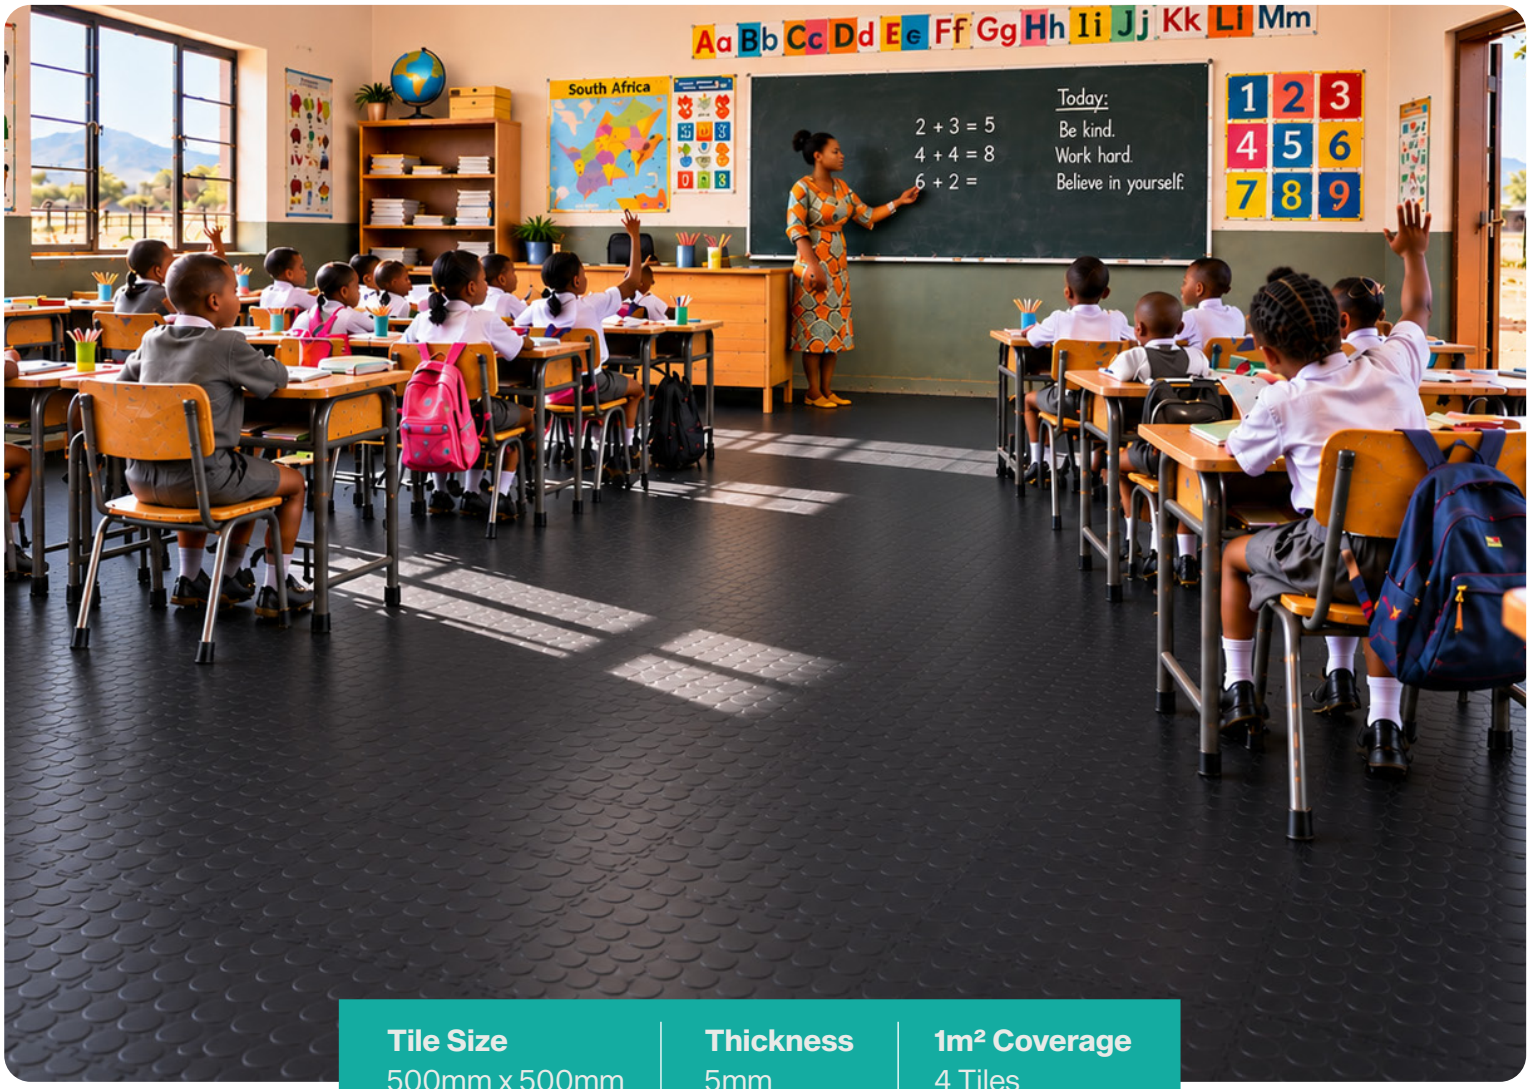

Tile Size	Thickness	1m² Coverage
500mm x 500mm	5mm	4 Tiles

Why Multi-lock?



Fast Installation
Interlocking edges fit together like puzzle pieces



Minimal Preparation
Suitable over a relatively level hard exisitng surface



Little Downtime
Useful where a space must return to service quickly



Durable Surface
Impact, abrasion, stain and spill resistant

Installation: Loose Lay or Stick Down - with 2-part polyurethane adhesive.
Stick down is recommended in large area installations and areas exposed to direct sunlight

Edge strip: 490mm x 42mm x 5mm.
Use at exposed edges and doorway transitions.
Confirm traffic and subfloor conditions before recommending the installation method.

